




*made by* **SCHÄFFER**

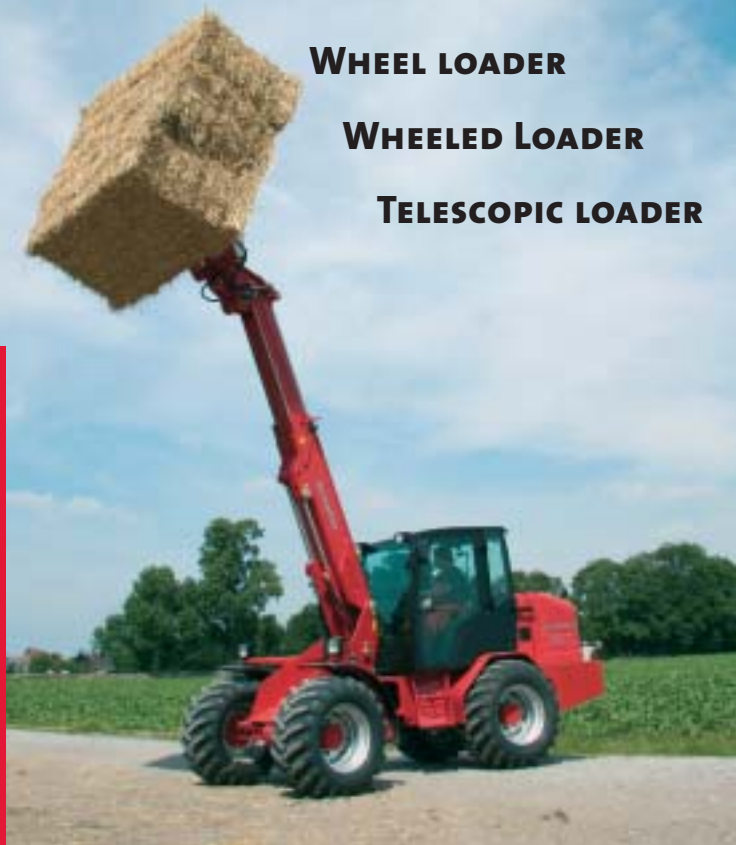

**WHEEL LOADER**

**WHEELED LOADER**

**TELESCOPIC LOADER**

**ENTIRE PROGRAM 2006/I**



**Schäffer**  
**Lader**

Wheel loader	217	3
	221 S	4
	222 S	5
	326 S	6
	336 S	7
	442 S	8
	2020	9
	2022	10
	2024 S	11
	2026 / 2026 S	12
	2033 / 2033 S	13
	3033 / 3033 S	14
	3036 / 3036 S	15
	3050	16
	3150 / 3150 S	17
	4048 / 4048 S	18
	4050 Z / 4050 ZS	19
	5050 Z / 5050 ZS	20
	5058 Z	21
	5060 ZL	22
	5070 Z / 5090 Z	23
	9100 Z	24
Telescopic loader	450 T / 450 TS	25
	670 T / 690 T	26
	900 T	27
	930 T	28
	980 T	29
Equipment / Importers		30-32
		33
		34-35

# Schäffer

## Lader 217

### Technical Specifications:

Engine:	3-cyl.-watercooled Kubota Diesel engine 14,7 kW = 20 hp
Tyres:	7.00 – 12 AS
Width:	790 mm – 1090 mm
Height:	1700 mm
Lifting height:	2500 mm (2700 mm with wide axle)
Length incl. bucket:	3360 mm
Turning radius:	530 mm
Operation weight:	1495 kg
Lifting capacity:	900 kg
Tipping load, straight:	700 kg
Tipping load, articulated:	400 kg
Speed:	0 – 13 km/h

As a standard with a hydraulic drive via a double gear pump, with hour meter, fuel gauge, working light and single lever control.



# Schäffer Lader 221 S

## Technical Specifications:

Engine:	3-cyl.-watercooled Kubota Diesel engine 19 kW = 26 hp
Tyres:	7.00 – 12 AS
Width:	890 mm – 1.090 mm
Height:	1.700 mm
Lifting height:	2.700 mm
Length incl. bucket:	3.400 mm
Turning radius:	550 mm
Operation weight:	1.655 kg
Lifting capacity:	950 kg
Tipping load, straight:	780 kg
Tipping load, articulated:	420 kg
Speed:	0 – 12 km/h

As a standard with a hydraulic drive via a double gear pump, with hour meter, fuel gauge, working light and single lever control, 2 sets of extra weights.



# Schäffer Lader 222 S

## Technical Specifications:

Engine:	3-cyl.-watercooled Kubota Diesel engine 19 kW = 26 hp
Tyres:	7.00 – 12 AS
Width:	890 mm – 1.090 mm
Height:	1.700 mm
Lifting height:	2.700 mm
Length incl. bucket:	3.400 mm
Turning radius:	550 mm
Operation weight:	1.700 kg
Lifting capacity:	950 kg
Tipping load, straight:	850 kg
Tipping load, articulated:	500 kg
Speed:	0 – 12 km/h

As a standard with a hydrostatic drive through a axial piston pump with automotive controlled drive system and electric switch, with hour meter, fuel gauge, working light and single lever control, 3 sets of extra weights.



# Schäffer

## Lader 326 S

### Technical Specifications:

Engine:	3-cyl.-watercooled Kubota Diesel engine 24 kW = 32 hp
Tyres:	10.075/15.3 AS
Width:	940 mm – 1.290 mm
Height:	1.950 mm
Lifting height:	2.810 mm (3.090 mm)
Length incl. bucket:	3.650 mm
Turning radius:	1.100 mm
Operation weight:	1.970 kg
Lifting capacity:	1.300 kg
Tipping load, straight:	1.000 kg
Tipping load, articulated:	750 kg
Speed:	0 – 15 km/h

As a standard with a hydrostatic drive through a axial piston pump with automotive controlled drive system and electric switch, with hour meter, fuel gauge, working light and single lever control, extra weight.



# Schäffer

## Lader 336 S

### Technical Specifications:

Engine:	3-cyl.-watercooled Kubota Diesel engine 26,5 kW = 36 hp
Tyres:	10.075/15.3 AS
Width:	1.020 mm – 1.440 mm
Height:	1.970 mm
Lifting height:	2.830 mm (3.100 mm)
Length incl. bucket:	3.790 mm
Turning radius:	1.100 mm
Operation weight:	2.120 kg
Lifting capacity:	1.500 kg
Tipping load, straight:	1.100 kg
Tipping load, articulated:	850 kg
Speed:	0 – 20 km/h

As a standard with a hydrostatic drive through a axial piston pump with automotive controlled drive system and electric switch, with hour meter, fuel gauge, working light and single lever control, extra weight, hydr. quick gear 20 km/h.



# Schäffer Lader 442 S

## Technical Specifications:

Engine:	4-cyl.-watercooled Kubota Diesel engine 36 kW = 50 hp
Tyres:	11.5/80-15.3 AS
Width:	1.220 mm – 1.420 mm
Height:	2.010 mm
Lifting height:	3.090 mm (3.270 mm)
Length incl. bucket:	4.070 mm
Turning radius:	1.300 mm
Operation weight:	2.595 kg
Lifting capacity:	1.800 kg
Tipping load, straight:	1.600 kg
Tipping load, articulated:	1.100 kg
Speed:	0 – 20 km/h

As a standard with a hydrostatic drive through a axial piston pump with automotive controlled drive system and electric switch, with hour meter, fuel gauge, working light and single lever control, extra weight, hydr. quick gear 20 km/h.





# Schäffer Lader 2020

## Technical Specifications:

Engine:	3-cyl.-watercooled Kubota Diesel engine 14,7 kW = 20 hp
Tyres:	7.00 – 12 AS
Width:	790 mm – 1090 mm
Height:	1830 mm
Lifting height:	2470 mm
Length incl. bucket:	3330 mm
Turning radius:	530 mm
Operation weight:	1400 kg
Lifting capacity:	1200 kg
Tipping load, straight:	750 kg
Tipping load, articulated:	350 kg
Speed:	0 – 12 km/h

As a standard with a hydraulic drive via a double gear pump, with hour meter, fuel gauge, working light and single lever control.



# Schäffer

## Lader 2022

### Technical Specifications:

Engine:	3-cyl.-watercooled Kubota Diesel engine 16 kW = 22 hp
Tyres:	7.00 – 12 AS
Width:	885 mm – 1.090 mm
Height:	1.770 mm
Lifting height:	2.800 mm (3.060 mm)
Length incl. bucket:	3.530 mm
Turning radius:	550 mm
Operation weight:	1.500 kg
Lifting capacity:	1.500 kg
Tipping load, straight:	890 kg
Tipping load, articulated:	500 kg
Speed:	0 – 12 km/h

As a standard with a hydraulic drive via a double gear pump, with hour meter, fuel gauge, working light and single lever control.



# Schäffer Lader 2024 S

## Technical Specifications:

Engine:	3-cyl.-watercooled Kubota Diesel engine 19 kW = (26 hp)
Tyres:	7.00 – 12 AS
Width:	885 mm – 1.090 mm
Height:	1.770 mm
Lifting height:	2.800 mm (3.060 mm)
Length incl. bucket:	3.530 mm
Turning radius:	550 mm
Operation weight:	1.650 kg
Lifting capacity:	1.500 kg
Tipping load, straight:	900 kg
Tipping load, articulated:	500 kg
Speed:	0 – 12 km/h

As a standard with a hydraulic drive via a double gear pump, with hour meter, fuel gauge, working light, single lever control and adjustable steering column.



# Schäffer 2026 / Lader 2026 S

## Technical Specifications:

Engine:	2026	3-cyl.-watercooled Kubota Diesel engine 19 kW = 26 hp
	2026 S	3-cyl.-watercooled Kubota Diesel engine 24 kW = 33 hp
Tyres:	2026	7.00 – 12 AS
	2026 S	27 x 8.50-15
Width:		885 mm – 1.090 mm
Height:		1.770 mm / cab 2.090 mm
Lifting height:		2.800 mm (3.060 mm)
Length incl. bucket:		3.530 mm
Turning radius:		550 mm
Operation weight:		1.750 kg / cab 1.950 kg
Lifting capacity:		1.500 kg
Tipping load, straight:		920 kg
Tipping load, articulated:		550 kg
Speed:		0 – 15 km/h

As a standard with a hydrostatic drive through a axial piston pump with automotive controlled drive system and electric switch, with hour meter, fuel gauge, rear weight, working light, combi-oilcooler, single lever control, extra valve and adjustable steering column.



# Schäffer 2033 / Lader 2033 S

## Technical Specifications:

Engine:	2033	3-cyl.-watercooled Kubota Diesel engine 24 kW = 33 hp
	2033 S	3-cyl.-watercooled Kubota Diesel engine 26,5 kW = 36 hp
Tyres:		10.075 / 15.3 AS
Width:		940 mm – 1.290 mm
Height:		1.800 mm / cab 2.140 mm
Lifting height:		2.880 mm (3.110 mm)
Length incl. bucket:		3.610 mm
Turning radius:		580 mm
Operation weight:		1.880 kg / cab 2.080 kg
Lifting capacity:		1.600 kg
Tipping load, straight:		1.000 kg
Tipping load, articulated:		720 kg
Speed:		0 – 15 km/h
Option:		0 – 20 km/h

As a standard with a hydrostatic drive with automotive controlled drive system and electric switch with hour meter, fuel gauge, rear weight, working light, combi-oilcooler, single lever control and extra valve.



# Schäffer 3033 / Lader 3033 S

## Technical Specifications:

Engine:	3033	3-cyl.-watercooled Kubota Diesel engine 24 kW = 33 hp
	3033 S	4-cyl.-watercooled Kubota Diesel engine 33 kW = 45 hp
Tyres:		10.075 / 15.3 AS
Width:		940 mm – 1.290 mm
Height:		1.800 mm / cab 2.120 mm
Lifting height:		2.950 mm (3.080 mm)
Length incl. bucket:		4.090 mm
Turning radius:		1.140 mm
Operation weight:		2.070 kg / cab 2.270 kg
Lifting capacity:		1.600 kg
Tipping load, straight:		1.100 kg
Tipping load, articulated:		750 kg
Speed:		0 – 15 km/h
Option:		0 – 20 km/h

As a standard with a hydrostatic drive through a axial piston pump, automotive controlled drive system and electric switch with hour meter, fuel gauge, working light, combi-oilcooler, single lever control and extra valve.



# Schäffer 3036 / Lader 3036 S

## Technical Specifications:

Engine:	3036	3-cyl.-watercooled Kubota Diesel engine 26,5 kW = 36 hp
	3036 S	4-cyl.-watercooled Kubota Diesel engine 33 kW = 45 hp
Tyres:	10.075 – 15.3 AS	
Width:	1.020 mm – 1.440 mm	
Height:	1.800 mm / cab 2.120 mm	
Lifting height:	2.950 mm (3.080 mm)	
Length incl. bucket:	4.090 mm	
Turning radius:	1.140 mm	
Operation weight:	2.110 kg / cab 2.310 kg	
Lifting capacity:	1.650 kg	
Tipping load, straight:	1.200 kg	
Tipping load, articulated:	800 kg	
Speed:	0 – 15 km/h	
Option:	0 – 20 km/h	

As a standard with a hydrostatic drive axial piston pump, automotive controlled drive system and electric switch with hour meter, fuel gauge, working light, combi-oilcooler, extra valve.



# Schäffer

## Lader 3050

### Technical Specifications:

Engine:	4-cyl.-watercooled Kubota Diesel engine 36 kW = 50 hp
Tyres:	10.075 – 15.3 AS
Width:	1.020 mm – 1.440 mm
Height:	1.820 mm / cab 2.140 mm
Lifting height:	2.970 mm (3.100 mm)
Length incl. bucket:	4.170 mm
Turning radius:	1.140 mm
Operation weight:	2.250 kg / cab 2.450 kg
Lifting capacity:	1.700 kg
Tipping load, straight:	1.400 kg
Tipping load, articulated:	950 kg
Speed:	0 – 15 km/h
Option:	0 – 20 km/h

As a standard with a hydrostatic drive through a axial piston pump, automotive controlled drive system and electric switch with hour meter, fuel gauge, working light, combi-oilcooler, extra valve.





# Schäffer 3150 / Lader 3150 S

## Technical Specifications:

Engine:	3150	4-cyl.-watercooled Kubota Diesel engine 38 kW = 50 hp
	3150 S	4-cyl.-watercooled Kubota Turbo-Diesel engine 45 kW = 60 hp
Tyres:		10.075-15.3 AS
Width:		1.020 mm – 1.440 mm (1.200 – 1.600 mm with planetary axle)
Height with ROPS bar/folded:		2.280 mm / 1.880 mm
Height with cab:		2.140 mm
Lifting height:		2.500 mm
Length incl. bucket:		4.070 mm
Turning radius:		1.140 mm
Operation weight:		2.500 kg / Cab 2.700 kg
Lifting capacity:		2.100 kg
Tipping load, straight:		1.850 kg
Tipping load, articulated:		1.300 kg
Speed:		0 – 15 km/h
Option I: 0 – 20 km/h		Option II: 0 – 30 km/h

As a standard with a hydrostatic drive though an axial piston pump, automotive controlled drive system and electric switch with hour meter, fuel gauge, working light, combi-oilcooler, extra valve, case weight 150 kg, ROPS-fold down roll bar.



# Schäffer 4048 / Lader 4048 S

## Technical Specifications:

Engine:	4048	4-cyl.-watercooled Kubota Diesel engine 36 kW = 50 hp
	4048 S	4-cyl.-watercooled Kubota Diesel engine 45 kW = 60 hp
Tyres:		11.5 / 80 – 15.3 AS
Width:		1.220 mm – 1.650 mm
Height:		1.950 mm / cab 2.180 mm
Lifting height:		3.270 mm
Length incl. bucket:		4.180 mm
Turning radius:		1.310 mm
Operation weight:		2.720 kg / cab 2.920 kg
Lifting capacity:		2.300 kg
Tipping load, straight:		1.800 kg
Tipping load, articulated:		1.100 kg
Speed:		0 – 20 km/h

As a standard with a hydrostatic drive through a axial piston pump, automotive controlled drive system and electric switch with hour meter, fuel gauge, working light, combi-oilcooler, extra valve, hydraulic switched gear, hydr. quick gear 20 km/h.



# Schäffer

## Lader

### 4050 Z / 4050 ZS

#### Technical Specifications:

Engine:	4050 Z	4-cyl.-watercooled Kubota Diesel engine 36 kW = 50 hp
	4050 ZS	4-cyl.-watercooled Kubota Diesel engine 45 kW = 60 hp
Tyres:		11.5 / 80 – 15.3 AS
Width:		1.220 mm – 1.650 mm
Height:		1.950 mm / cab 2.180 mm
Lifting height:		3.220 mm
Length incl. bucket:		4.520 mm
Turning radius:		1.310 mm
Operation weight: 4050 Z		3.100 kg / cab 3.300 kg
Operation weight: 4050 ZS		3.150 kg / cab 3.350 kg
Lifting capacity:		2.400 kg
Tipping load, straight:		2.000 kg
Tipping load, articulated:		1.500 kg
Speed:		0 – 20 km/h

As a standard with a hydrostatic drive through a axial piston pump, automotive drive system and electric switch with hour meter, fuel gauge, working light, combi-oilcooler, extra valve, hydr. tool-lock, hydraulic switched gear, 1 rear weight, 1 case weight, 2 x water filling valves and water with anti freeze in rear wheels.



# Schäffer

## Lader

### 5050 Z / 5050 ZS

#### Technical Specifications:

Engine:	5050 Z	4-cyl.-watercooled Kubota Diesel engine 36 kW = 50 hp
	5050 ZS	4-cyl.-watercooled Kubota Diesel engine 45 kW = 60 hp
Tyres:	11.5 / 80 – 15.3 AS	
Width:	1.270 mm – 1.600 mm	
Height:	2.200 mm hardtop/cab	
Lifting height:	3.300 mm	
Length incl. bucket:	4.780 mm	
Turning radius:	1.410 mm	
Operation weight:	3.250 kg (hardtop) 3.400 kg (cab)	
Lifting capacity:	2.550 kg	
Tipping load, straight:	2.200 kg	
Tipping load, articulated:	1.700 kg	
Speed:	0 – 20 km/h	

As a standard with extra valve, combi-oilcooler, hydraulic switched gear, oscillating rear axle, hydraulic tool lock, planetary axles with differential brakes, road lights.



# Schäffer

## Lader 5058 Z

### Technical Specifications:

Engine:	4-cyl.-watercooled Kubota Diesel engine 45 kW = 60 hp
Tyres:	15.0/55 – 17 AS
Width:	1.420 mm – 1.800 mm
Height:	2.320 mm hardtop/cab
Lifting height:	3.400 mm
Length incl. bucket:	4.870 mm
Turning radius:	1.670 mm
Operation weight:	3.700 kg (hardtop) 3.850 kg (cab)
Lifting capacity:	2.800 kg
Tipping load, straight:	2.400 kg
Tipping load, articulated:	2.100 kg
Speed:	0 – 20 km/h

As a standard with extra valve, combi-oilcooler, hydraulic switched gear, oscillating rear axle, hydraulic tool lock, planetary axles with differential brakes, road lights, extra weight.



# Schäffer

## Lader 5060 ZL

### Technical Specifications:

Engine:	4-cyl.-watercooled Kubota Diesel engine 45 kW = 60 hp
Tyres:	15.0/55-17 AS
Width:	1.420 mm – 1.800 mm
Height with cab:	2.320 mm
Lifting height:	3.400 mm
Length incl. bucket:	4.870 mm
Turning radius:	1.670 mm
Operation weight:	4.050 kg
Lifting capacity:	2.800 kg
Tipping load, straight:	2.400 kg
Tipping load, articulated:	2.100 kg
Speed:	0 – 20 km/h

As a standard with extra valve, combi-oilcooler, quick gear 20 km/h, oscillating rear axle, hydraulic tool lock, planetary axles with automatic limited slip differential, road lights. Low noise level in cabin due to reduced motor rpm and anti noise package.



# Schäffer 5070 Z / Lader 5090 Z

## Technical Specifications:

Engine:	5070 Z	4-cyl.-watercooled Kubota Diesel engine 54 kW = 75 hp
	5090 Z	4-cyl.-watercooled Kubota Turbo-Diesel engine 65 kW = 90 hp
Tyres:		15.0/55-17 AS
Width:		1.420 mm – 1.800 mm
Height:		2.320 mm (hardtop/cab)
Lifting height:		3.400 mm
Length incl. bucket:		5.050 mm
Turning radius:		1.750 mm
Operation weight:	5070 Z	3.800 kg (hardtop) 3.950 kg (cab)
	5090 Z	4.170 kg (hardtop) 4.320 kg (cab)
Lifting capacity:		2.800 kg
Tipping load, straight:		2.600 kg
Tipping load, articulated:		2.250 kg
Speed:		0 – 20 km/h Option: 0 – 30 km/h

As a standard with extra valve, combi-oilcooler, hydraulic switched gear, oscillating rear axle, hydraulic tool lock, planetary axles with automotic limited slip differential, road lights.



# Schäffer

## Lader 9100 Z

### Technical Specifications:

Engine:	4-cyl.-watercooled Deutz Turbo-Diesel engine 75 kW = 102 hp
Tyres:	405/70-20
Width:	1.780 mm – 2.050 mm
Height:	2.460 mm hardtop/cab
Lifting height:	3.400 mm (3.800 mm)
Length incl. bucket:	5.360 mm
Turning radius:	1.650 mm
Operation weight:	5.100 kg (hardtop) 5.200 kg (cab)
Lifting height: 3.800 mm	5.500 kg (hardtop) 5.600 kg (cab)
Lifting capacity:	3.800 kg
Tipping load, straight:	3.200 kg
Tipping load, articulated:	2.750 kg
Speed:	0 – 20 km/h
Option:	0 – 35 km/h

As a standard with extra valve, combi-oilcooler, hydraulic switched gear, oscillating rear axle, hydraulic tool lock, planetary axles with automatic limited slip differential, road lights.





# Schäffer Lader 450 T / 450 TS

## Technical Specifications:

Engine:	450 T	4-cyl.-watercooled Kubota Diesel engine 36 kW = 50 hp
	450 TS	4-cyl.-watercooled Kubota Diesel engine 45 kW = 60 hp
Tyres:	15.0/55 – 17 AS	
Width:	1.270 mm – 1.600 mm	
Height:	2.210 mm hardtop/cab	
Lifting height:	4.040 mm	
Length incl. bucket:	4.970 mm	
Turning radius:	1.410 mm	
Operation weight:	3.760 kg (hardtop) 3.960 kg (cab)	
Lifting capacity:	1.800 kg	
Tipping load:	1.300 – 500 kg	
Speed:	0 – 20 km/h	

As a standard with extra valve, combi-oilcooler, hydraulic switched gear, oscillating rear axle, hydraulic tool lock, planetary axles with differential brakes, road lights, automatic limited slip differential.



# Schäffer 670 T / Lader 690 T

## Technical Specifications:

Engine:	670 T	4-cyl.-watercooled Kubota Diesel engine 54 kW = 75 hp
	690 T	4-cyl.-watercooled Kubota Turbo-Diesel engine 65 kW = 90 hp
Tyres:	670 T	15.0/55-17 AS
	690 T	425/55 R17 AS
Width:		1.570 mm – 1.800 mm
Height:		2.320 mm hardtop/cab
Lifting height:		4.520 mm
Length incl. bucket:		5.430 mm
Turning radius:		1.750 mm
Operation weight:	670 T	4.670 kg (hardtop) 4.820 kg (cab)
	690 T	4.750 kg (hardtop) 4.900 kg (cab)
Lifting capacity:		2.800 kg
Tipping load, straight:		2.050 kg – 1.000 kg
Speed: 0 – 20 km/h		Option: 0 – 30 km/h

As a standard with extra valve, combi-oilcooler, hydraulic switched gear, oscillating rear axle, hydraulic tool lock, planetary axles with automatic limited slip differential, road lights.



# Schäffer Lader 900 T

## Technical Specifications:

Engine:	4-cyl.-watercooled Deutz Turbo-Diesel engine 75 kW = 102 hp
Tyres:	405/70-20
Width:	1.850 mm or 2.080 mm
Height:	2.450 mm hardtop/cab
Lifting height:	5.250 mm
Length incl. bucket:	5.800 mm
Turning radius:	2.050 mm
Operation weight:	5.900 kg / 6.000 kg (with cab)
Lifting capacity:	3.800 kg
Tipping load:	2.600 kg – 1.400 kg
Speed:	0 – 20 km/h
Option:	0 – 35 km/h

As a standard with extra valve, combi-oilcooler, quick gear 20 km/h, oscillating rear axle, hydraulic tool lock, planetary axles with automatic limited slip differential, road lights.



# Schäffer

## Lader 930 T

### Technical Specifications:

Engine:	4-cyl.-watercooled Deutz Intercooler – Turbo-Diesel engine 95 kW = 130 hp
Tyres:	600/40-22.5
Width:	2.110 mm
Height:	2.500 mm hardtop/cab
Lifting height:	5.250 mm
Length incl. bucket:	5.800 mm
Turning radius:	1.990 mm
Operation weight:	6.500 kg / 6.600 kg (with cab)
Lifting capacity:	4.200 kg
Tipping load:	2.800 kg – 1.600 kg
Speed:	0 – 20 km/h
Option:	0 – 35 km/h

As a standard with extra valve, combi-oilcooler, quick gear 20 km/h, oscillating rear axle, hydraulic tool lock, planetary axles with automatic limited slip differential, road lights, case weight 410 kg.



# Schäffer Lader 980 T

## Technical Specifications:

Engine:	4-cyl.-watercooled Deutz Intercooler – Turbo-Diesel engine 115 kW = 156 hp
Tyres:	700 / 40-22.5
Width:	2.320 mm
Height:	2.695 mm cab
Lifting height:	6.200 mm
Length incl. bucket:	6.400 mm
Turning radius:	1.700 mm
Operation weight:	8.350 kg (with cab)
Lifting capacity:	4.000 kg
Tipping load:	3.500 –2.500 kg
Speed:	0 – 40 km/h

As a standard with extra valve, combi-oilcooler, gear 40 km/h, oscillating rear axle, hydraulic tool lock, planetary axles with differential brakes, road lights, automatic limited slip differential.





feed bucket



4:1 opening bucket



straw blower for big bales



fork lift for big bales



light material bucket



feed bucket with turbo milling head



heavy duty bucket with teeth



high tip bucket



feed bucket with rubber conveyor



standard bucket with grab



manure fork with grab



heavy duty manure fork with grab



silage bucket with grab



big bale gripper



pallet fork



snow blade



dozer blade



sweeper with dust bucket



feed bucket with screw conveyor



shear grab



double knife mower



feed blade with manure fork  
with grab



dirt pusher



pallet fork for big bales with  
supporting frame



arena leveller



flail mower



demolition hammer



post hole driller





# IMPORTERS

## Algeria

MULTREN Eurl  
58, rue Mellal Mohamed  
Staoueli  
16000 Alger Algeria  
phone/fax +213 21392272  
tab\_dz@yahoo.fr

## Australia

Agtech International  
Cameron Moir  
22 Park Road  
MT. Lawley WA 6050  
phone +61 8 92712270  
fax +61 8 92711280  
www.schaffer-loaders.com.au  
cmoir@agtech-international.com

## Austria

ERTL-AUER GmbH  
Badeseestraße 5  
4933 Wildenau  
phone +43 77556677  
fax +43 7755667773  
www.ertl-auer.at  
info@ertl-auer.at

## Belgium

N.V. Heusdens Renting  
Orgelstraat 6  
3803 St. Truiden  
phone +32 11 683899  
fax +32 11 683165  
www.schaffer.be  
info@schaffer.be

## Canada

BP International Inc.  
653 Main Street  
Box 682, Morris, Manitoba  
Canada R0G 1K0  
phone +1 204 7462108  
fax +1 204 7466806  
bpi@mts.net

## Denmark/Sweden/Norway

Helms TMT-Centret A/S  
Tavlundvej 4-6, Lind  
7400 Herning  
phone +45 99282930  
fax +45 99282938  
www.helmstmt.com  
mail@helmstmt.com

## Estonia

Kesko Agro Eesti As  
Pildiküla Rae Vald  
Põrguvälja Tee 3A  
75301 Harjuma  
phone +372 7447612  
fax +372 7447612  
www.keskoagro.com  
info@keskoagro.ee

## Finland

Konefarmi Oy  
Laurilantie 10 B  
21450 Tarvasjoki  
phone +358 405036276  
fax +358 24311570  
www.konefarmi.fi  
konefarmi@konefarmi.fi

## Franc

Equipements Modernes Agricoles  
- EMA -  
Zone Industrielle Sud  
57430 Sarralbe  
phone +33 387978380  
fax +33 387970752  
ema.clement@wanadoo.fr

## Greece

EMIKO S.A.  
111 Orfeos Str.  
11855 Athen  
phone +30 2 103485000  
fax +30 2 103461653  
smits@emiko.gr

## Great Britain

Webster's Wheeled Loaders  
Five Ways  
Coventry Road, Wolvey  
Leicestershire LE 10 3HF  
phone +44 1455221015  
fax +44 1455221787  
www.schaffer.co.uk  
schaffer@loaders.fsbusiness.co.uk

## Ireland

Cyril Johnston & Co. Ltd.  
Ballynahinch Road  
Carrduff, BT 8 8 DJ  
N.-Ireland  
phone +44 2890813121  
fax +44 2890814220  
www.cyriljohnston.co.uk  
dolway@cyriljohnston.co.uk

## Iceland

Jötunn-Vélar ehf  
Grenigrund 19  
800 Selfoss  
phone +354 4800400  
fax +354 4824108  
www.jotunn.is  
jotunn@jotunn.is

## Italy

F. Staudacher  
Fuggerstr. 18, Via Fugger  
39049 Sterzing-Vipiteno  
phone +39 0472766010  
fax +39 0472766585  
www.staudacher.it  
staudacher.f@dnet.it

## Latvia

Kesko Agro Latvija Sia  
Vienibas Gatve 93  
1058 Riga  
phone +371 7064300  
fax +371 7064301  
www.keskoagro.com  
info@keskoagro.lv

## Lebanon/Syria/Jordan/Egypt/Iraq

Jerico Contracting & Trading Co.  
Assad Badoui Bldg.  
001 Main Street  
Amioun, El Koura  
Libanon fon: 009613231959  
00961 3 233414  
fax: 00961 6 951818  
jericolb@hotmail.com

# IMPORTERS

## Lituania

UAB Kesko Agro Lietuva  
Savanoriu Ave. 191  
2053 Vilnius  
phone +3705 2477400  
fax +3705 2477420  
www.keskoagro.com  
info@keskoagro.lt

## Luxemburg

Agri-Center Massen S.A.  
1, Route de Stavelot  
9999 Wemperhardt  
phone +352 26901201  
fax +352 26901200  
www.agri-center.lu  
agri.center@massen.lu

## Netherlands

Cees Berkhof  
Barneveldsestraat 20  
3927 CC Renswoude  
phone +31 318572345  
fax +31 318572325  
www.ceesberkhof.nl  
info@ceesberkhof.nl

## Poland

PERKOZ Sp.z.o.o.  
ul. Sikorskiego 19a  
87-300 Brodnica  
phone +48 56 4934057  
fax +48 56 4983234  
www.perkoz.com.pl  
info@perkoz.com.pl

## Portugal

Sociedade Metalurgica dos  
Canaviais, LD  
Rui Batista  
Quinta da Bela Vista, Pav. 31  
Canaviais -7000-213 Evora  
phone/fax +351 266761711  
www.smcanaviais.com  
rui.batista@netvisao.pt

## Rumania

S.C. Farm Tech S.R.L.  
Strada Republici 6A, Oltenita  
915400 Calarasi  
phone +40 723549591  
evabelle@xnet.ro

## Russia

„Ekoniva Technika“  
ul. Kulneva 3  
121170 Moskau  
phone +7 095 9330031/32  
fax +7 095 9330037  
www.ekoniva.com  
orderdesk@ekoniva.com

## Switzerland

GVS Agrar AG  
Land- und Kommunalmaschinen  
Majorenacker 11  
8207 Schaffhausen  
phone +41 526311900  
fax +41 526311929  
www.gvs-agrar.ch  
info@gvs-agrar.ch

## Spain

Evergreen Giles R. Cox  
Ctra. Martorell, 118  
08224 Terrassa  
phone +34 937 802224  
fax +34 937858270

## Czech

Multos s.r.o.  
P.O. Box 133  
U Prostredniho Mlyna 128  
39301 Pelhrimov  
phone +42 366323284  
fax +42 366323205  
www.multos-pelhrimov.cz  
multos@iol.cz